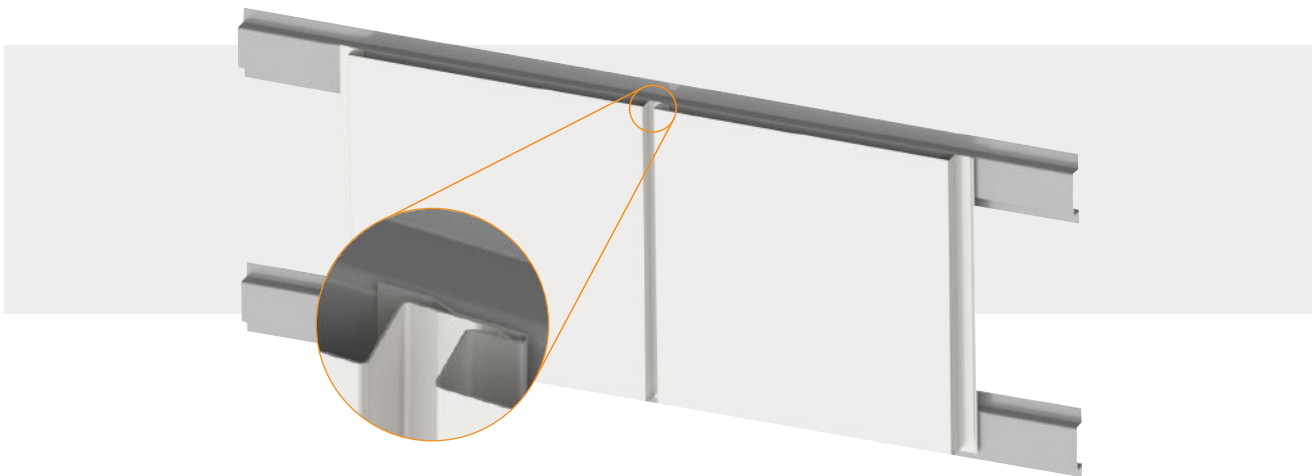







OVERVIEW

The Euroclad Interlocking Panel system is an extremely versatile wall cladding solution using a cassette type panel. The seams are recessed and can vary from 5mm to 20mm wide each. Panels are installed from the top down covering all fixings as you go. Panels can also be installed vertically or horizontally. The Euroclad Interlocking Panel system






is fast and easy to install over large wall areas offering reduced installation time. Panels are fixed using concealed fasteners directly into top-hat sections perpendicular to the panel face. The pan widths are customisable using our state of the art manufacturing equipment to the millimetre allowing total control over your designs.



FEATURES

-  Fast easy snap together panels
-  Available from 3degs roof pitch through to vertical
-  Modern cassette type panel without the need for silicone joints.
-  Concealed fasteners
-  Can be installed by any roofing contractor

MATERIALS

-  **COPPER**
-  **CORTEN**
-  **ALUMINIUM**
-  **ZALMAG**
-  **COLORBOND**

ADDRESS

3/328 Brisbane Rd, Labrador QLD 4214

TELEPHONE

+61 7 5537 1937

EMAIL

info@euroclad.com.au

ABN

45 297 371 439

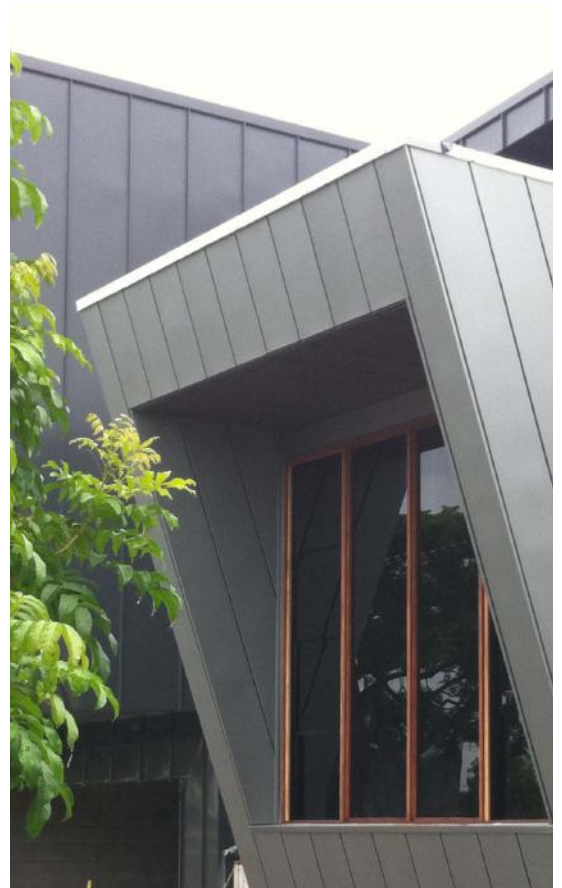


INSTALLATION

- 20 mm continuous air gap must be beneath the panels for ventilation.
- Proctor breathable roofshield fixed to substrate
- Euroclad Interlocking panels are installed on a minimum 20mm ventilation batten
- Concealed fasteners attached directly into batten behind.
- Push together seams and level off

APPLICATIONS

- Facades
- Scoffits
- Wall Cladding



**Metal cladding/roofing and especially lengthy flat-span sheet-metal panels often will exhibit waviness, commonly referred to as "oil-canning." The degree of oil-canning and the appearance of the panels will vary depending on factors such as the length and colour of the panels, alloy, gauge, substrate condition and exposure to sunlight. Oil-canning pertains to aesthetics and not the performance of the panels and is not controlled by the contractor. The type of metal roofing panels specified can affect the degree of oil-canning. Euroclad is not responsible for oil-canning or aesthetics. Oil-canning shall not be grounds to withhold payment or reject panels of the type specified. For more information please contact Euroclad.

ADDRESS

3/328 Brisbane Rd, Labrador QLD 4214

TELEPHONE

+61 7 5537 1937

EMAIL

info@euroclad.com.au

ABN

45 297 371 439