



Solid aluminum



EuraSolid2.0

Color your world with Euramax



Solid aluminum

EuraSolid2.0 combines high thickness aluminum with superior coatings. The result is a modern and lasting facade material with perfect flatness and unrivalled mechanical resistance. EuraSolid2.0 is non-combustible, fully recyclable and represents an attractive rest value.

Request samples



Contact our **Architectural Support** for information or samples:

T +31 (0)475 370 341

E max@euramax.eu


We are happy to speak to you in



Look and feel



EuraSolid2.0 in EuraMica

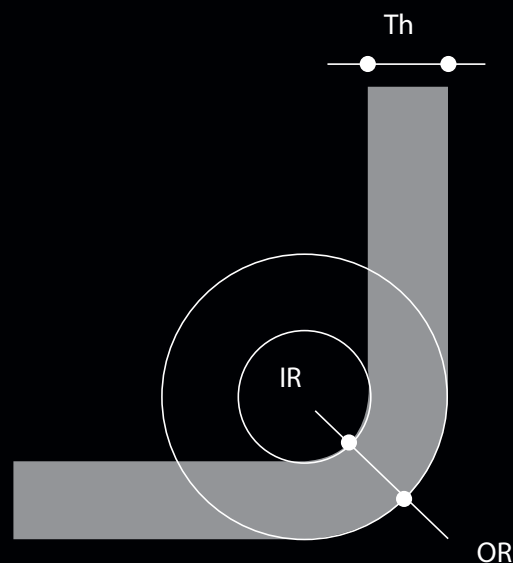

Technical specifications EuraSolid2.0

Thickness	2 mm
Coil width	600 up to 1500 mm
Minimum order	500 m ¹
Cut to length	Max. 4500 mm
Aluminum alloy	5754 AlMg3 / 3005AlMn1Mg0.5 Other alloys on request
Aluminum temper	H42 / other tempers on request
Recyclability	100%
Fire resistance	Non combustible / non flammable (A1 class material acc EN 13501-1)
Tensile strength (Rm) N/mm ²	220 - 270
Yield strength (Rp0.2) N/mm ²	≥ 130
Elongation	^A 50 > 9%

Bend radii EuraSolid2.0

Thickness (Th)	Alloy	Inside radius (IR)	Outside radius (OR)
2.00	5754H42	≥ 5 mm	≥ 7 mm
2.00	3005H42	≥ 4 mm	≥ 6 mm

Available coatings EuraSolid2.0

EuraBuild	Uni and metallic finishes
AnoMax	Pre-coated anodising finishes
EuraMica	Iridescent colors with fascinating color variation
EuraZinc	Self weathering zinc coating
Jeweler range	Exceptional colors for your finest achievements

EuraSolid2.0 collection



EuraSolid 3 or 4 layers Polyvinylidene Fluoride (PVDF) or Fluor Polymer (Lumiflon)



EuraSolid 2 layers Polyvinylidene Fluoride (PVDF) or Fluor Polymer (Lumiflon)




EuraBuild 2 layers High Durable Polymer (HDP)

Guidelines

- Install metallic panels in the same direction to avoid reflection differences
- Order projects in one batch to avoid color differences
- Minimum quantities as from 500 linear meters
- Many other colors available on www.euramax.eu



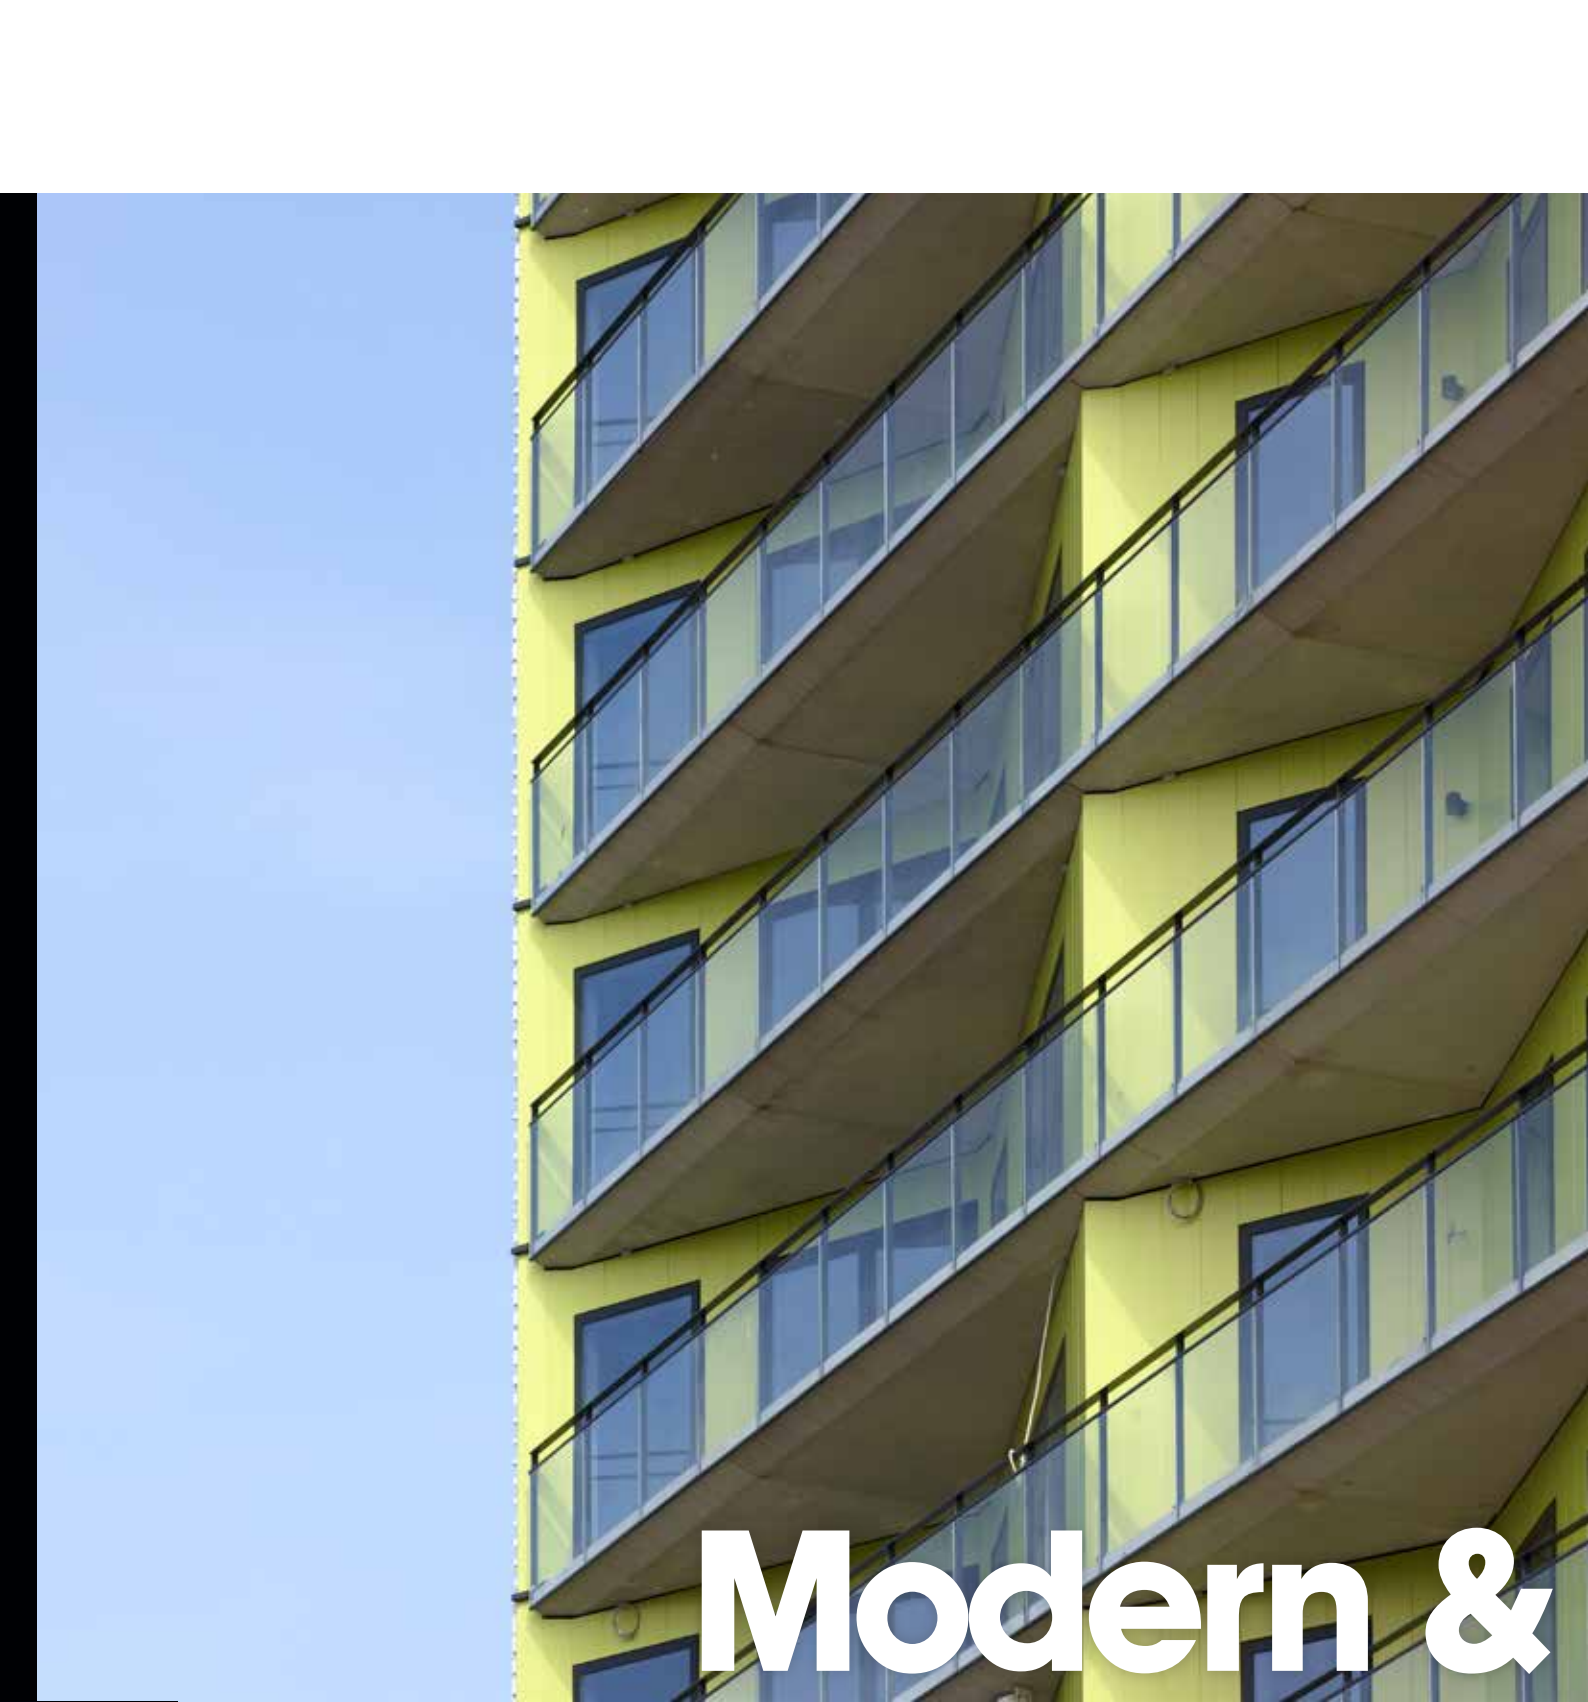

Modern & lasting facades



EURAMAX

Ambro Metals Limited

14 Timothy Place | Avondale
Auckland 1026 | New Zealand
T +64 (9)828 1814
euramax@ambrometals.com



www.euramax.eu

